



ISO-DRAIN[®] 8 FOAM

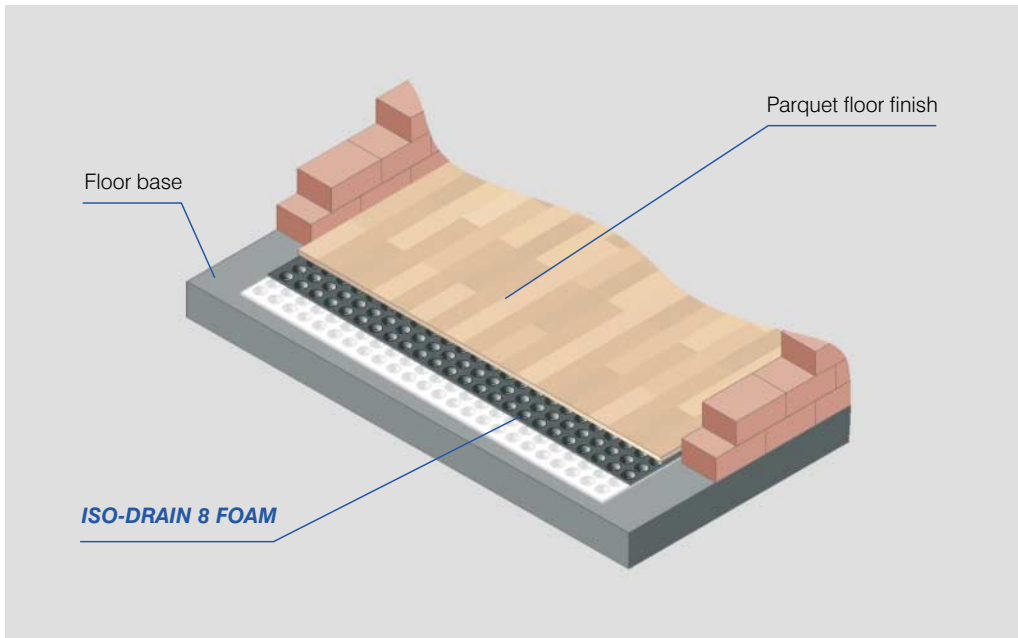

Benefits:

ISO-DRAIN 8 FOAM is a composite underlay made from INTERPLAST dimpled sheet which provides outstanding insulation under a variety of floor finishes. Its integrated foam layer maximizes footfall sound reduction and enhances thermal insulation. The continuous air gap created by the dimple texturing ensures full-surface air circulation and keeps rising damp away from the floor finish. The noise deadening benefits are a feature of particular interest:

- The integrated 3 mm foam layer made from high-resiliency polyethylene (foam density: appr. 33 kg/m²) effects outstanding footfall sound reduction
- The resultant noise reduction is much greater than that achieved with conventional insulating materials: 26Δ_{LW} (dB), measured as per the DIN 52210 procedure (Test report will be provided on request)

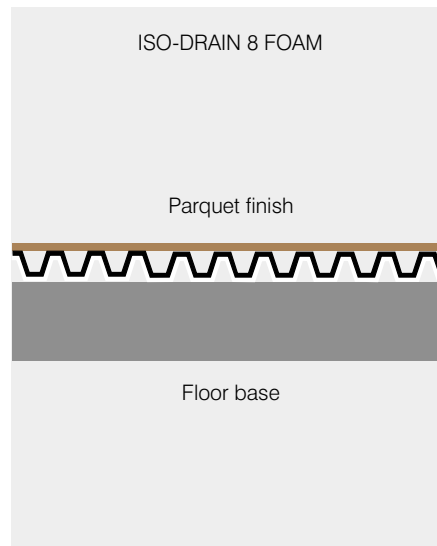

For more information on INTERPLAST products, visit us at www.interplast.de or ask for our full range of product information brochures.

INTERPLAST[®] Kunststoffe GmbH



Bühlwiesenweg 1
72221 Haiterbach · Germany

Telephone: +49 (0) 74 56 - 9 30 08-0
Fax: +49 (0) 74 56 - 9 30 08-86

E-Mail: info@interplast.de
<http://www.interplast.de>

INTERPLAST[®]
Inline Process Technologies



ISO-DRAIN® 8 FOAM



Properties	Values
Material	
• Dimpled sheet	HDPE
• Foam layer	PE
Colour	
• Dimpled sheet	black
• Foam layer	white
Thickness	
• Dimpled sheet (apprx.)	0.6 mm
• Foam layer	3 mm
Sheet width	2.0 m
Area weight (apprx.)	700 g/m ²
Dimple height	8 mm
Dimple spacing (apprx.)	1150 pro m ²
Compressive strength (apprx.)	150 kN/m² (15 t/m²)
Service temperature range	-40 °C to +80 °C
Physiological properties	non-polluting for drinking water

**Insulating floor
underlay**

INTERPLAST dimpled sheet products are resistant to a wide range of chemicals, impervious to root penetration, rot-proof and unaffected by soil bacteria and fungi.

INTERPLAST dimpled sheet products conform to applicable DIN standards. Installation should be done using only original accessories (see brochure "Installation Accessories").

INTERPLAST® Kunststoffe GmbH



Bühlwiesenweg 1
72221 Haiterbach · Germany

Telephone: +49 (0) 74 56 - 9 30 08-0
Fax: +49 (0) 74 56 - 9 30 08-86

E-Mail: info@interplast.de
<http://www.interplast.de>

INTERPLAST®
Inline Process Technologies

